



Electrically Insulated Adapters

With a 3,000 psi capacity, **Sealum** insulated adapters are used where electrical insulation is required for hydraulic hose connections. The insulating material is Phenolic with a dielectric strength (short time) of 350 UPM and a compressive strength of 38,000 psi.

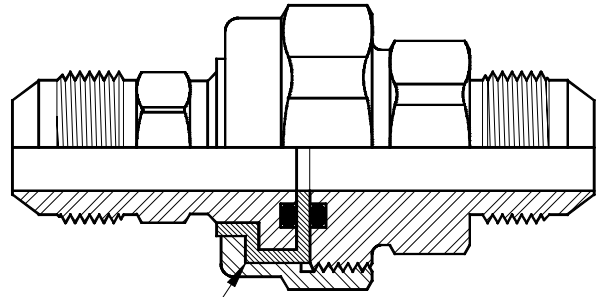


Phenolic Insulator

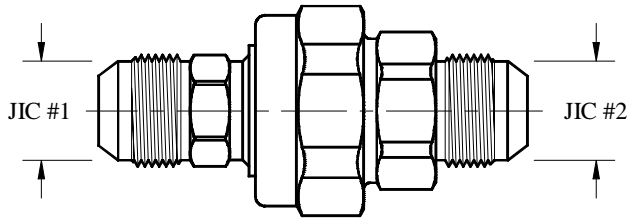


JIC Male / JIC Male

Part No.	JIC #1	JIC #2
3375-08-08	#8 (3/4"-16)	#8 (3/4"-16)
3375-12-12	#12 (1-1/16"-12)	#12 (1-1/16"-12)
3375-16-16	#16 (1-5/16"-12)	#16 (1-5/16"-12)

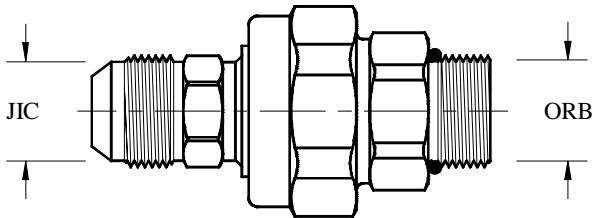


JIC Male / ORB Male

Part No.	JIC	ORB
3180-08-08	#8 (3/4"-16)	#8 (3/4"-16)
3180-12-12	#12 (1-1/16"-12)	#12 (1-1/16"-12)
3180-16-16	#16 (1-5/16"-12)	#16 (1-5/16"-12)

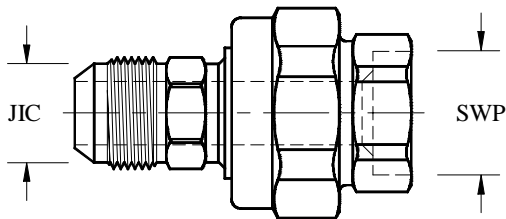

JIC Male / Socket Weld Pipe (SWP)

Part No.	JIC	SWP
3417-08-08	#8 (3/4"-16)	1/2" (0.845)
3417-12-12	#12 (1-1/16"-12)	3/4" (1.055)
3417-16-16	#16 (1-5/16"-12)	1" (1.320)

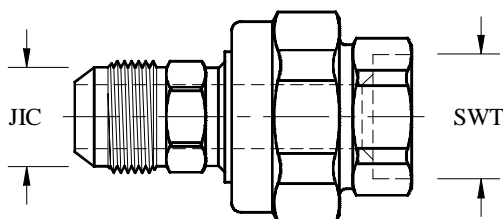

JIC Male / Socket Weld Tube (SWT)

Part No.	JIC	SWT
2958-08-08	#8 (3/4"-16)	1/2" (0.505)
2958-12-12	#12 (1-1/16"-12)	3/4" (0.755)
2958-16-16	#16 (1-5/16"-12)	1" (1.005)